

Data collection station

ZIP-10000U-8B





Specifications

Technical Specification	
System	
Main Processor	Industrial-grade embedded controller
Operating System	Embedded Linux
External Port	
Network Port	1 × RJ-45 gigabit Ethernet ports
USB	1 × USB 2.0 port 1 × USB 3.0 port
RS-232	1
HDD Interface	4 × SATA3.0; max. 16 TB for one HDD.
Function	
Device Access Status Indication	Yes
Device Update	Supports updating MPTs or body cameras automatically or manually; Supports local or online updating of collection station
Auto Acquisition	Yes
Priority Acquisition	Yes
Web Configuration	Yes
FTP	Yes
Performance	
Collection Speed	Max. downloading speed: 64 MB/s
General	
Power Adapter	3-core power port
Power Supply	100–240 VAC, 50/60 Hz

Power Consumption Single control module (no HDD): 7 W	Power Consumption Single control module (no HDD): 7 W
Product Dimensions	398.8mm × 280.0mm × 107.0mm(15.70" × 11.02" × 4.21")
Packaging Dimensions	477.0mm × 373.0mm × 249.0mm(18.78" × 14.69" × 9.80")
Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Operating Humidity	0%–90% (non-condensing)
Operating Environment	Indoor
Net Weight	4.69 kg (10.34 lb) (without disks)
Gross Weight	6.25 kg (13.78 lb)

Dimension

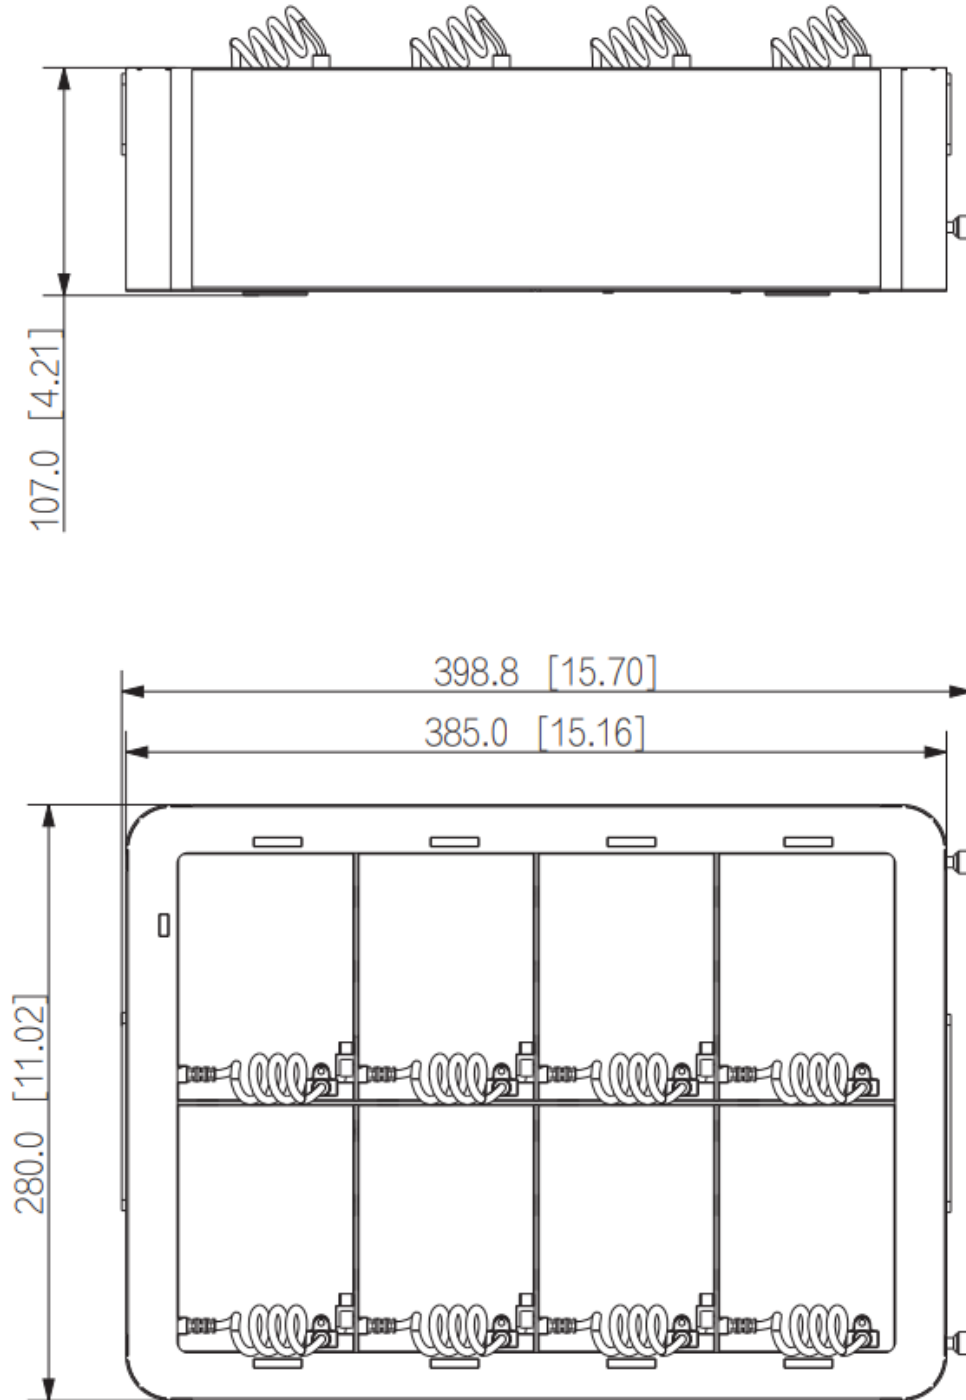

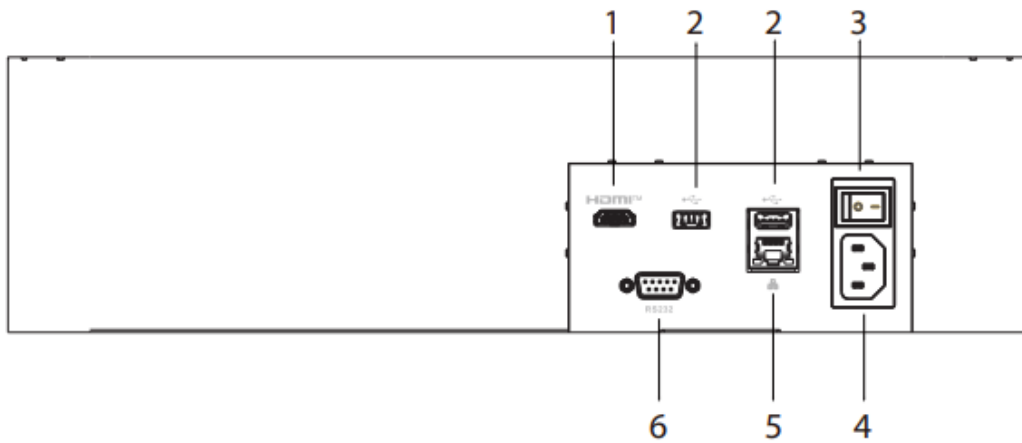

1 HDMI Port

2 USB Port

3 Power Switch

4 Power Input

5 Network Port

6 RS-232 Port